

Visual Indicator (VI)

Clearly view valve position status from up to 75 feet with StoneL's Stand Alone Visual Indicator. The indicator's rugged Lexan® construction makes it resistant to physical damage and tolerant to most corrosives.

You may conveniently attach the visual indicator directly to actuators with the VDI/VDE 3845 (Namur) mounting pattern featured on most contemporary actuators. Other mounting configurations are also available for non-Namur actuators and valve operators.



Stand Alone Visual Indicator (VI)

The stand alone visual indicator features the same materials and viewability as the Eclipse trigger and visual indicator.

Features include:

- Direct attachment to VDI/VDE 3845 (ISO/Namur) actuator mounting pads.
- High impact Lexan® construction offers superior durability and corrosion resistance.
- Readily adaptable to most quarter-turn actuators.
- Offers high visibility, positive confirmation for all of your automated valve systems.



Model Selector

VI		Indicator and Trigger*
R		Red Closed
1		Three Way
2		Three Way
X		Special (must use spec number)

*See Visual Indicator Designations Chart on page 15

Visual Indicator Mounting (required for all VI)

960801 Namur Sizes 1 and 2

960803 Namur Size 3

960804 Namur Size 4

Consult factory for other non-Namur applications.

- Kits conform to standard ISO/NAMUR actuator patterns.
- All kits stainless steel.
- Namur size 3 kit fits all shaft sizes.

Specifications and Ratings

Materials of Construction

Housing	Lexan® Polycarbonate
Drum Components	Lexan® Polycarbonate
Fasteners	Stainless Steel
Coupling	Stainless Steel

Operating Life Unlimited

Temperature Range -40° C to 82° C (-40° F to 180° F)

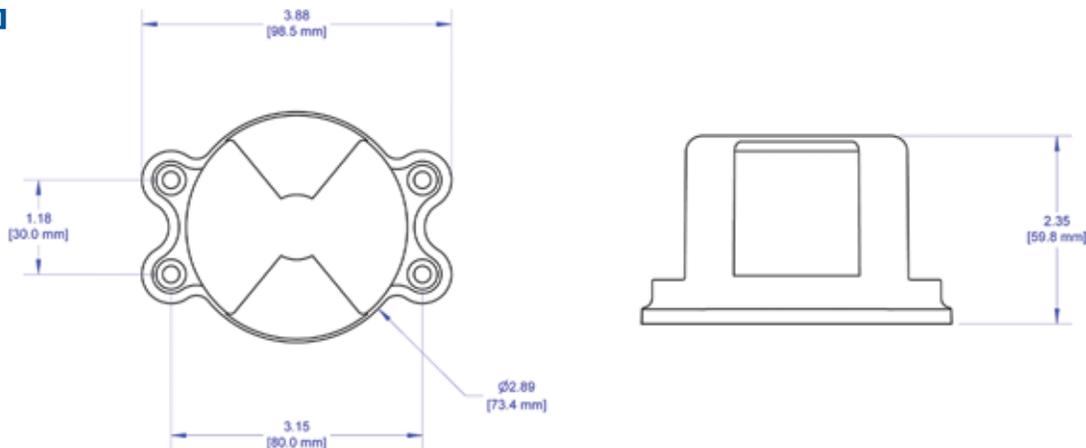
Warranty

Two Years

Lexan® is a registered trademark of General Electric Corporation.

Dimensions













Inches [mm]



Visual Indication Designations

Visual Indications Chart applies to all ValvePoint platforms. See model numbers on the following pages to determine the option available for each platform:

Axiom page 9
 Eclipse page 12
 Quartz page 20

DESIGNATION	0°	90°	180°
R	CLOSED	OPEN	
G	CLOSED	OPEN	
F (Eclipse Only)			
1			
2			
3		CLOSED	
4			
5			
C			
X	Specialty Configuration - please consult factory		